

Ultrabar 15


UHP Triplex Pump



Water Jetting Solutions

Plunger Diameter mm	Gear ratio Input Speed (rpm)			Pump Speed rpm	Power Required		Nominal Flowrate			Max Pressure	
	1500	1800	2000		kW	HP	lpm	igpm	usgpm	bar	psi
14	4.00			375	53	71	10.4	2.3	2.7	2750	40,000
	3.67			409	58	77	11.3	2.5	3.0		
		4.00		450	63	85	12.4	2.7	3.3		
	3.12			481	68	91	13.3	2.9	3.5		
		3.67		490	69	93	13.5	3.0	3.6		
			4.00	500	70	94	13.8	3.0	3.7		

Additional Notes. 1. Flowrates indicated are swept volume & will reduce with pressure 2. Other gear ratios are available for specific applications
3. Pump stroke 60mm 4. 9 bar (130 psi) inlet pressure required, filtered to 1 micron

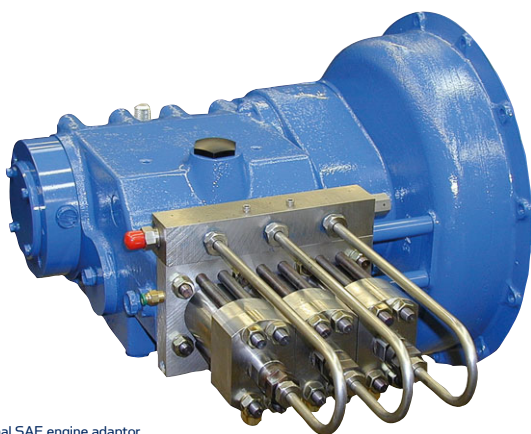

Ultrabar 15 with optional SAE engine adaptor

Features

- Solid ceramic plungers with floating crosshead attachment
- Self adjusting seals with internal water cooling
- Hardened, alloy steel crankshaft with heavy duty roller and steel backed white metal main bearings, supported between each connecting rod
- SG iron crankcase with pressure lubrication, filtration and oil cooling
- Forged connecting rods with low friction, shell type big end bearings and lead bronze lined small end bushes
- Gear driven, eliminating the need for belt drive
- Burst disc for overpressure protection


The Ultrabar 15 model is the mid range Ultra High Pressure pump from Hughes & is ideal for single gun applications.

The close coupled, gear driven power end has pressure lubrication, filtration and oil cooling. SAE adaptor housings are available enabling the pump to be flange mounted to a diesel engine flywheel housing or electric motor ensuring extremely compact, perfectly aligned installations and enclosing all moving parts. The Ultrabar range of pumps include design features that allow seals and valves to be monitored

- General Dimensions - typical pump build
- Approx weight - 230 kg

without tools and maintenance on individual cylinders.



This improved design is capable of Ultra High Pressure with outstanding seal, plunger and valve life.

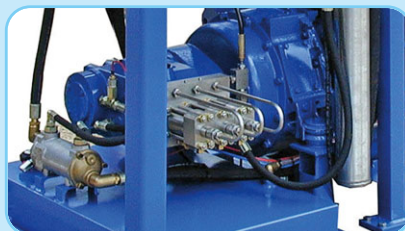

Ultrabar 15 flange mounted to diesel engine

Build Options

- Choice of gear ratio to suit diesel engine or electric motor drive
- SAE adaptor housings (SAE 2 or 3) for flange mounting the pump to a diesel engine flywheel housing or electric motor
- Available without gearbox for low speed direct drive
- Pressure adjusting valves
- Bare shaft pump only or complete unit build

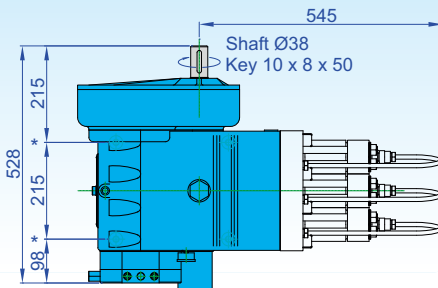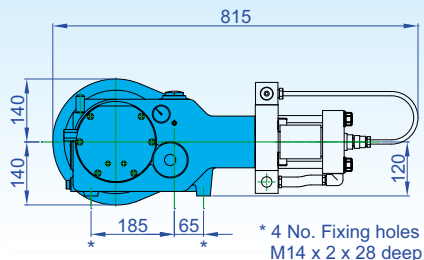

Hughes Pumps Limited

Spring Gardens, Washington, West Sussex, RH20 3BS UK

Tel: +44 (0) 1903 892358

www.hughes-pumps.co.uk

Fax: +44(0) 1903 892062

sales@hughes-pumps.co.uk



In line with the Company's policy of research and development, alterations in design, dimensions and appearance are incorporated from time to time in order to ensure that important developments are included at the earliest opportunity. The Company, therefore, reserves the right to alter design, dimensions etc without notice.